



# GEARFLAG PONTOON BOAT COVER

This manual applies to boat types: Pontoon boat

## ⚠ WARNING

- \* Do not occupy boat while boat cover is put on.
- \* Do not turn on the engine or motor of the boat when cover is on.
- \* Never install the cover on a wet day or icy day when the deck is slippery.
- \* Never install on a windy day.
- \* Make sure boat trailer is securely parked before installing or removing the cover.




It is strongly recommended that the cover to be installed and removed by at least two people.


## What is in the box



Storage pouch



Boat cover



Elastic straps with hooks x 2




Tie down rope

## Before installation

Fold down bimini top from the boat before installation



Make sure the wheels are securely blocked with wheel stoppers

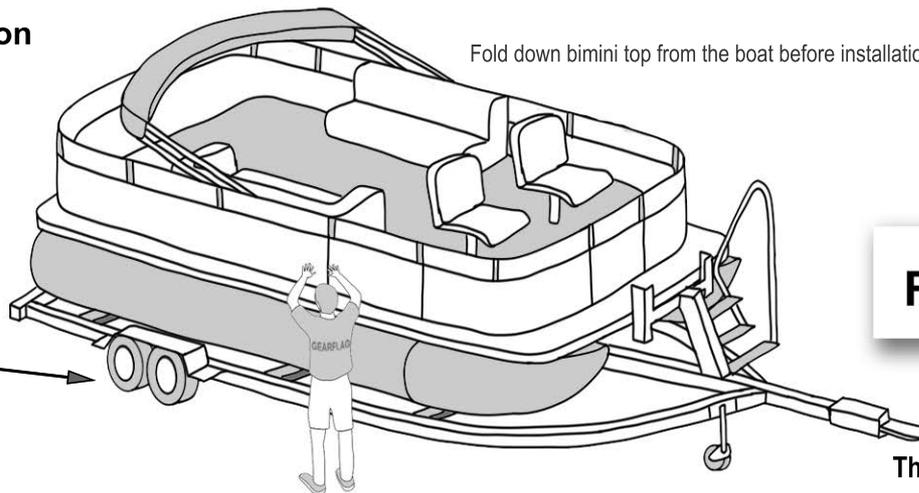

**FRONT**

### The "FRONT" label

Locate the "FRONT" label in the cover when unfolding the cover. The "FRONT" label side should align with the front of boat



## Maintenance

- \* DO NOT machine wash
- \* DO NOT use detergent to clean the surface
- \* DO NOT use alcohol on the cover surface
- \* Keep away from heat or fire

- \* Make sure the cover is dry before folding for storage. Do not store the cover when it is wet.
- \* Use moisture sponge to clean the cover gently if needed
- \* Use soft brush to dust away the dirt on the cover surface if needed


Missing Parts? Replacement? Warranty? Please contact us [support@gearflag.com](mailto:support@gearflag.com)

WARNING: Avoid sharp objects on boat. Make sure all sharp objects or sharp corner are properly covered before installing the boat cover.



# GEARFLAG TRAILER BOAT COVER

This manual applies to boat types: Pontoon boat

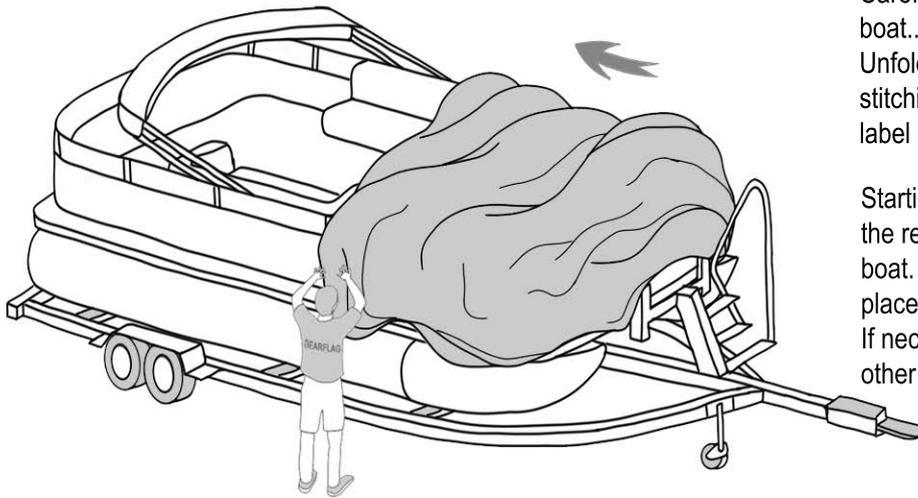


Carefully place the boat cover on the deck of the boat..

Unfold the boat cover. Locate the "FRONT" label stitching on the boat cover. The side with "FRONT" label should be aligned to the front of boat.

Starting from the front, gently pull the boat cover to the rear. Make sure the cover is covering the entire boat. The elastic hems of the boat cover should be placed on all corners of the boat.

If necessary, please have another person on the other side of the boat to help the installation.

**WARNING:** Avoid sharp objects on boat. Make sure all sharp objects or sharp corner are properly covered before tightening the boat cover.

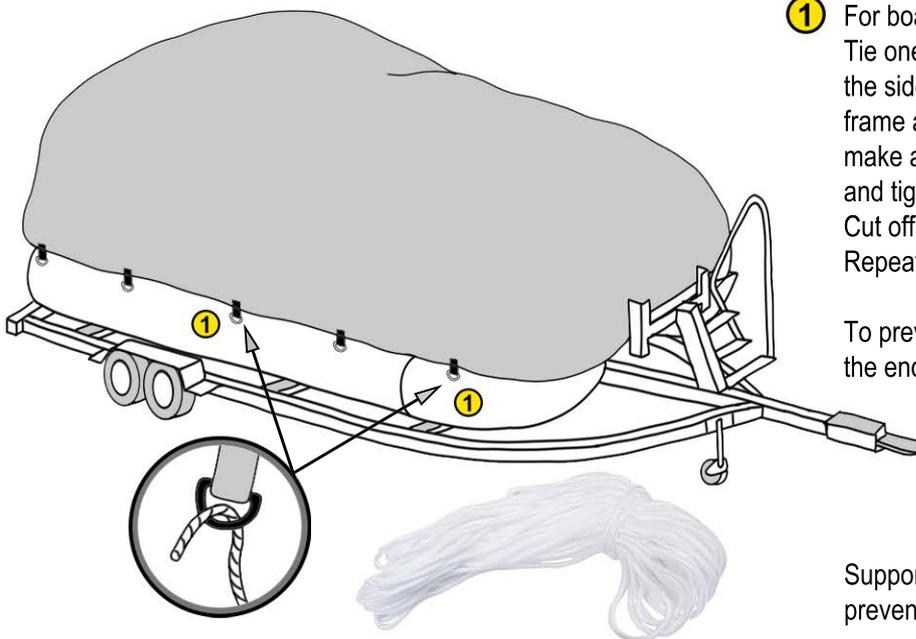


**1** For boat loading on the trailer:

Tie one end of the tie down rope through the D-ring on the side of the cover. Pull the rope down to the trailer frame as shown on the left. Allow enough rope to make a knot with the end of the rope. You may adjust and tighten as necessary for the cover on the boat. Cut off the excessive rope for the rest of the D-rings. Repeat the same process with the rest of the D-rings.

To prevent fraying of the rope, use a lighter to singe the ends of the rope.

Support pole (not included) is recommended for preventing water puddle building up on the boat cover.

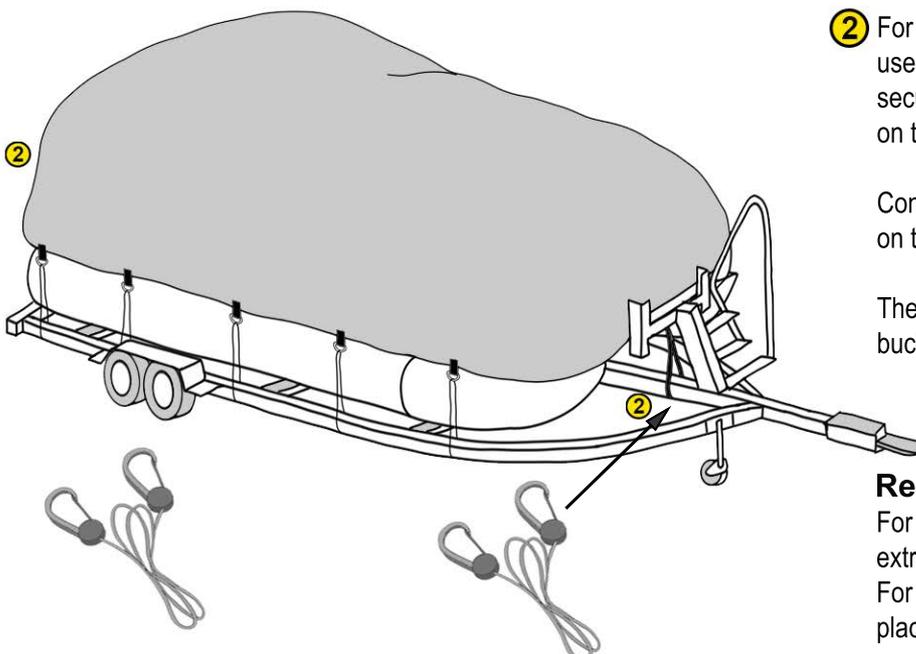

**2** For the boat cover stern and front of the cover, use the 2 supplied elastic straps with hooks to secure with the main frame of the trailer as shown on the left.

Connect the tie down straps to the sew in buckles on the boat cover. Tighten the straps if needed.

The straps will go across the bottom of the boat and buckle with the other end of the cover.

**Recommendation**

For better protection from strong wind and storm, tie extra of the rope across the trailer.

For long term storage, park the boat under shaded place is highly recommended.