



GEARFLAG POP-UP CAMPER COVER

This manual applies to RV types: Pop-up Camper / Folding tent trailer

⚠ WARNING

- * Make sure the popup camper is folded into trailing position.
- * Do not trailer the camper with cover is on.
- * Do not turn on the air-conditioner or engine of the RV when cover is on.
- * Never install the cover on a wet day or icy day when the roof top is slippery.
- * Never install on a windy day.
- * Make sure RV is securely parked before installing or removing the cover.
- * Avoid sharp object or corner.




It is strongly recommended that the cover to be installed and removed by at least two people.

What is in the box




Storage pouch



Camper cover


Windproof straps

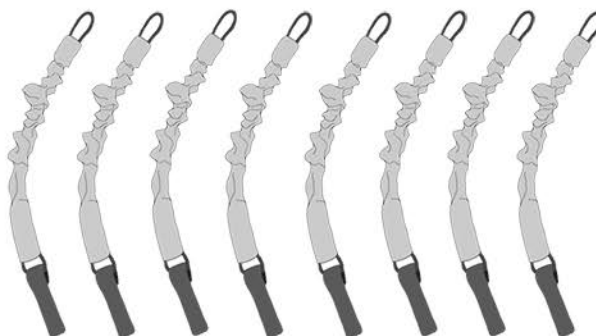

Before installation



Make sure the wheels are securely blocked with wheel stoppers

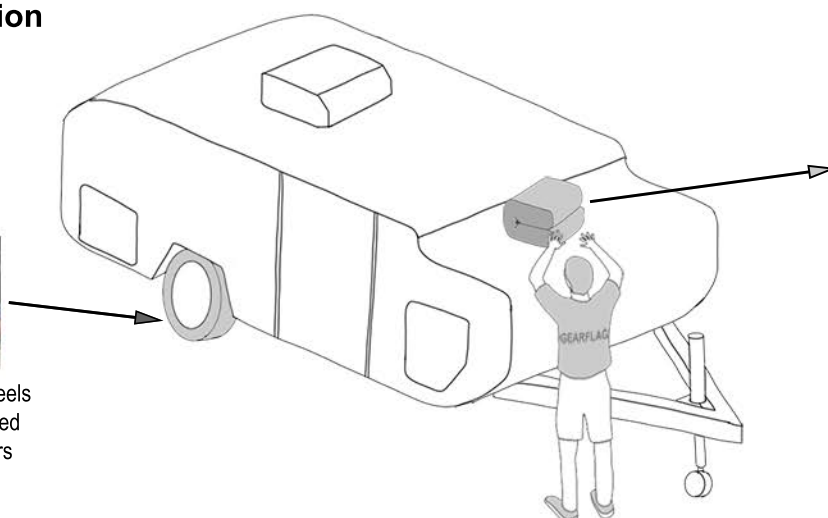

FRONT

NOTE:
Before towing the camper, take the cover off.
DO NOT tow the camper with cover on.
The camper cover is for storage of camper purpose only.

Warranty and support:
email: support@gearflag.com
GEARFLAG USA

The "FRONT" label


Locate the "FRONT" label in the cover when unfolding the cover. The "FRONT" label side should align with the front of camper

Maintenance

- * DO NOT machine wash
- * DO NOT use detergent to clean the surface
- * DO NOT use alcohol on the cover surface
- * Keep away from heat or fire
- * Make sure the cover is dry before folding for storage
- * Use moisture sponge to clean the cover gently if needed
- * Use soft brush to dust away the dirt on the cover surface if needed
- * Avoid sharp objects on RV. Make sure all sharp objects or sharp corner are properly covered before installing the RV cover

GEARFLAG POP-UP CAMPER COVER

This manual applies to RV types: Pop-up Camper / Folding tent trailer

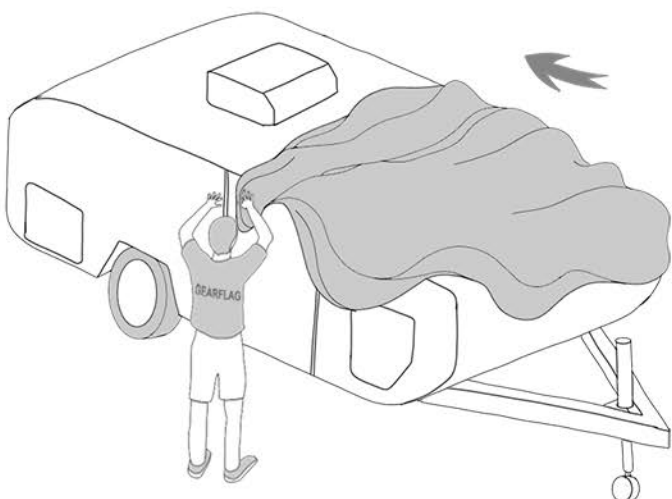


- 1** Carefully place the rv cover at the center of the roof.

Unfold the rv cover. Locate the "FRONT" label stitching on the rv cover. The side with "FRONT" label should be aligned to the front of RV / camper.

- 2** Starting from the front, allow the side panels of 4 corners to be free fall. If necessary, please have another person on the ground to help catching the side panels.

DO NOT step on the cover.
DO NOT stretch the cover before the camper is fully covered.

WARNING: Avoid sharp objects on camper. Make sure all sharp objects or sharp corner are properly covered before tightening the camper cover.

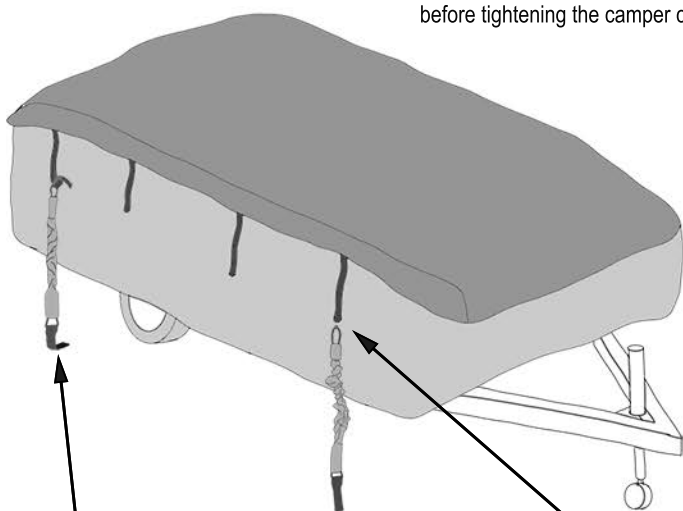


- 3** Connect the elastic straps to the trangle flap straps on the camper cover by tying knobs as shown on the figure.
Repeat the same process to all straps.



- 4** Bend the cloth covered metal plate on the other end of the elastic straps into hook shape as shown on the picture.
Repeat the same process to all straps.



Bend the cloth covered metal plate on the elastic straps into a hook shape as shown on about figure.



- 5** Pull the metal plate hook down to the bottom of the camper. Hook the metal plate to metal beam or bar under the camper securely.

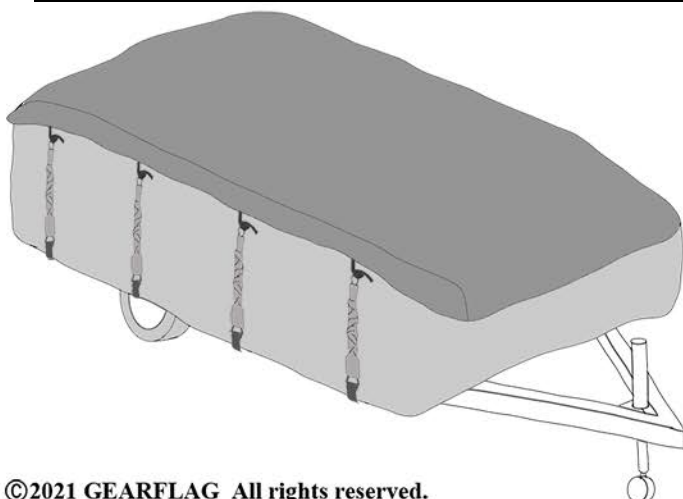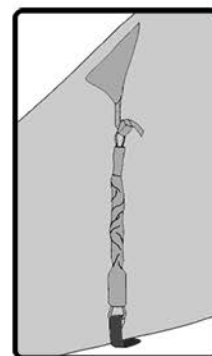

Recommendation

For better protection from wind and long term storage, it is strongly recommended to securely connect the straps to the bottom of the camper.

Store the camper under shaded place is highly recommended.

For missing part and warranty, please contact us support@gearflag.com