




CUSTOM FIT WRANGLER TJ (2-DOORS) FRONT AND REAR SEAT COVERS


This manual applies to: 1997 - 2002 TJ
2003 - 2006 TJ, LJ

Front Seats *

- Driver side upper seat cover
- Driver side lower seat cover
- Passenger side upper seat cover
- Passenger side lower seat cover




1 Bag of Metal Clips

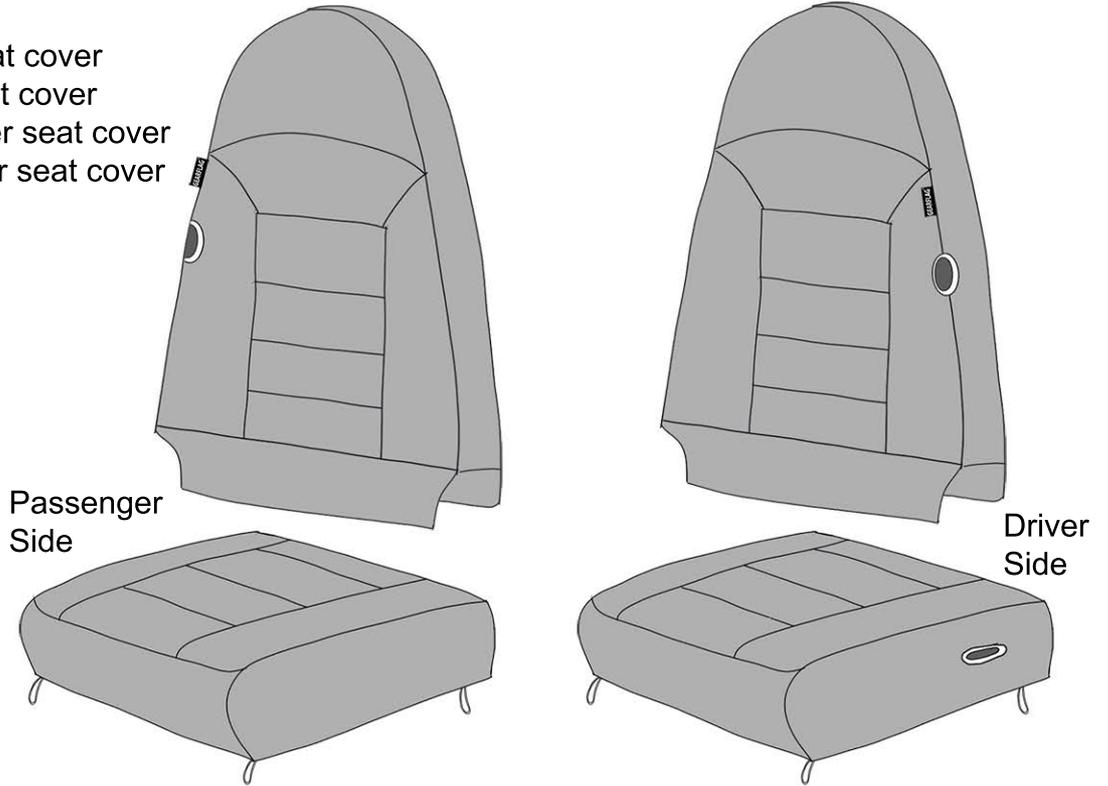

Rear Seat *

- Rear upper bench cover
- Rear lower bench cover

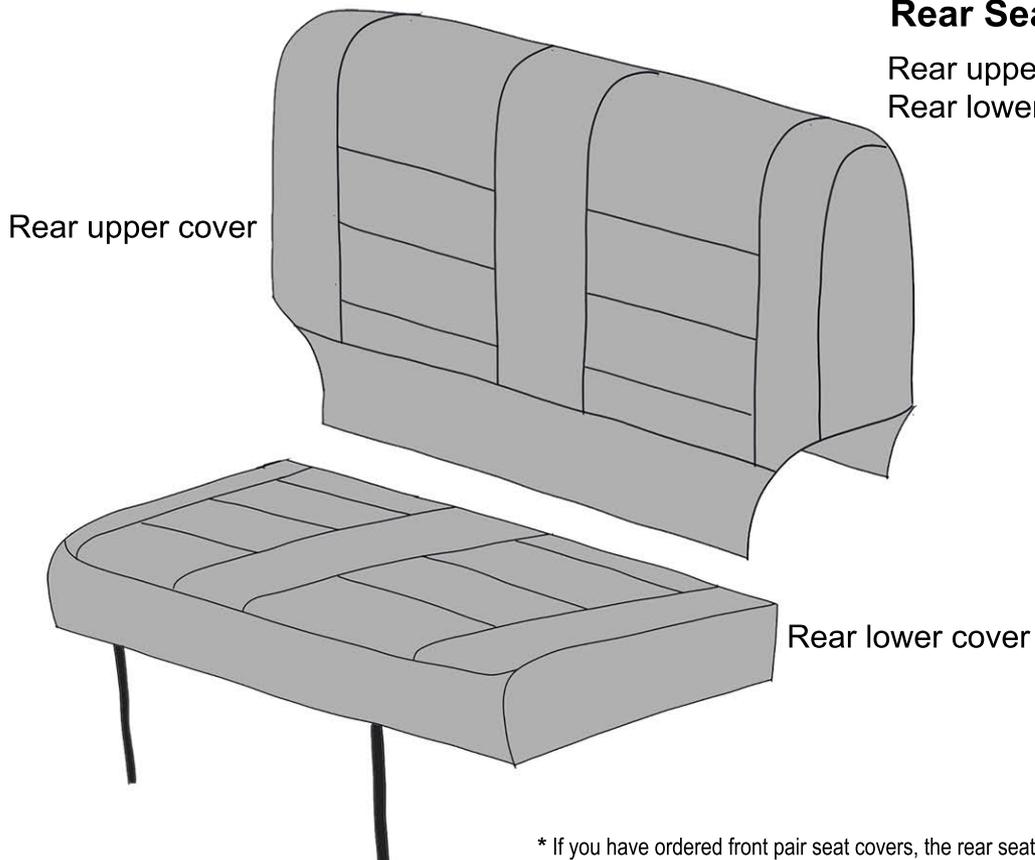



* If you have ordered front pair seat covers, the rear seat covers are not included.
If you have ordered rear seat covers, the front seat covers are not included.

Missing Parts? Replacement? Please contact us.

This is brand new seat cover, folding wrinkle will be found when taking out of box. Neoprene is flexible material. After fitting on the seats, the folding wrinkle will eventually disappear for certain of time.

CUSTOM FIT WRANGLER TJ FRONT SEAT INSTALLATION


Please check all the parts before installation.
Start installing on Driver Side front seat first.

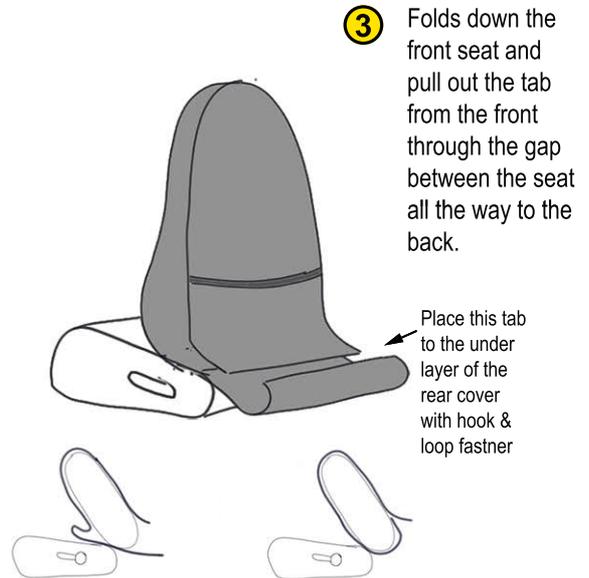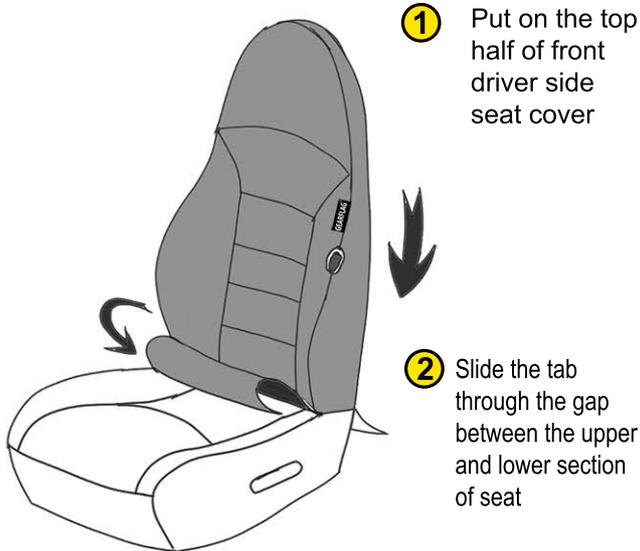

- 4** Place the bottom half of seat cover on to the seat. **

Please note that the front driver side bottom seat cover has a lever opening.

- 5** Slide the tab through the gap between the upper section and lower section of the seat. Fold down the front seat would help sliding the tab easily.

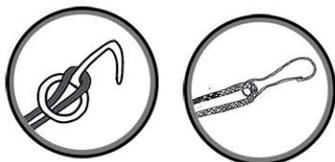

Connect the metal hook to each of the elastic loop.

The metal hook on the elastic loops hook on the metal wire underneath the seat to secure the seat cover for snug fit.



** Please note that the front driver side bottom seat cover has a opening for seat adjusting lever.

- 6** Repeat the installation to the passenger side front seat.

This is brand new seat cover, folding wrinkle will be found when taking out of box. Neoprene is flexible material. After fitting on the seats, the folding wrinkle will eventually disappear for certain of time.


Due to the snug fit of the seat covers, some effort may be required for installation.

Any question? Feel free to ask us.

CUSTOM FIT WRANGLER TJ REAR SEAT INSTALLATION

Please check all the parts before installation.



- 1** Put on the top half of rear bench seat cover

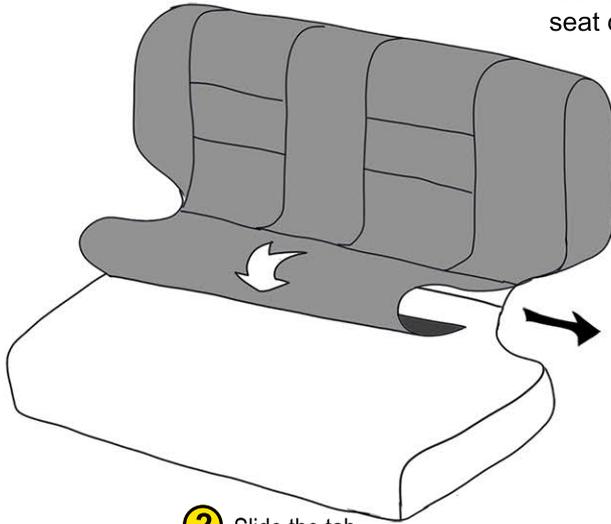

- 2** Slide the tab through the gap between the upper and lower section of seat




- 3** Folds down the bench seat if necessary for pulling out the tab from the front through the gap between the upper and lower seat.

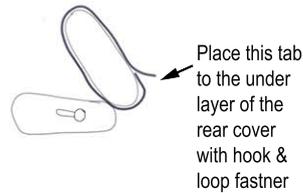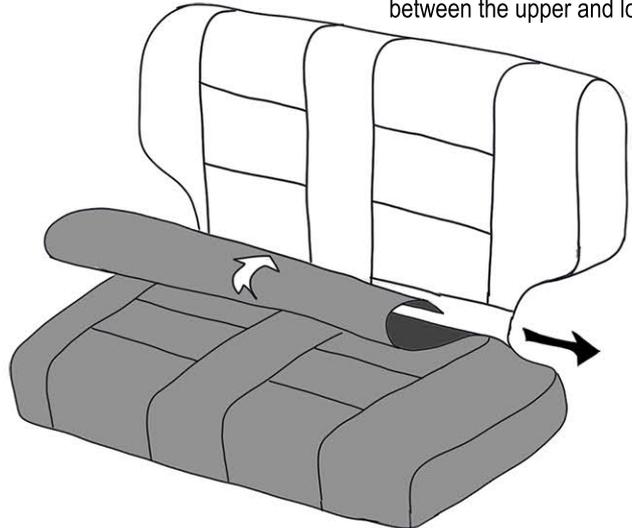

- 4** Place the bottom half of seat cover on to the seat.

- 5** Slide the tab through the gap between the upper section and lower section of the seat. Fold down the seat would help sliding the tab easily.

- 6** Lift up the folding rear seat, and connect the buckles of across below the seat.

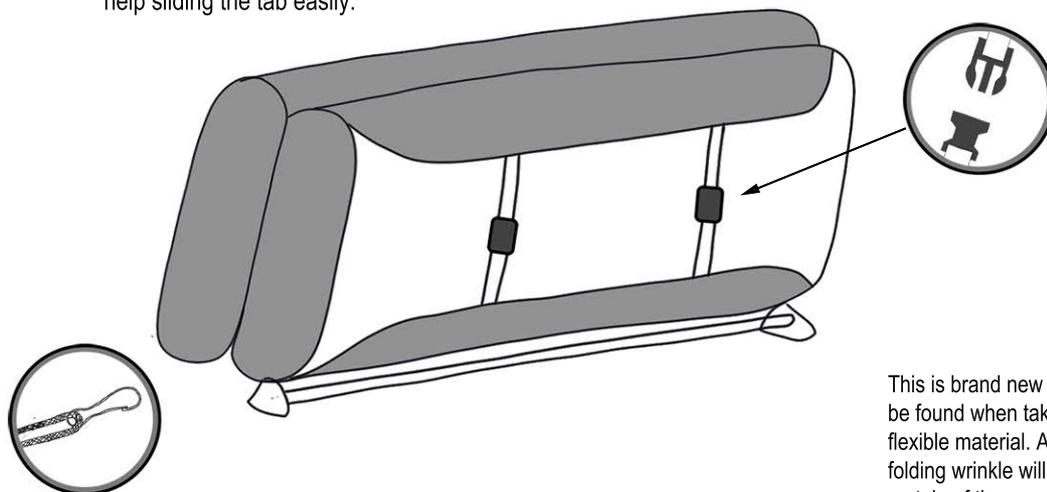

Connect the metal hook to each of the elastic loop.

The metal hook on the elastic loops hook on the metal wire underneath the seat to secure the seat cover for snug fit.



This is brand new seat cover, folding wrinkle will be found when taking out of box. Neoprene is flexible material. After fitting on the seats, the folding wrinkle will eventually disappear for certain of time.

Due to the snug fit of the seat covers, some effort may be required for installation.

Any question? Feel free to ask us.
@gearflag